

10-20H I Brewery

Standard Brewery by Joh. Albrecht



Brewhouse

Annual output

Beer style

Control

Design

Energy supply

Power

Heating

Water

Installation area

Room size

Height

Floor load

Brew vessels

Value [Unit]

2000–10000 [hl]

All beer styles – infusion/decoction

Manual, semi and fully automatic

Stainless steel, copper
or individual combination

40 [kW]

Gas 23,7 [m³/h]

5 [m³/h], ≥ 4 [bar]

400–800 [m²]

≥ 4 [m]

2000 [kg/m²]

2–4

Additional modules for complete brewery

Our recommendation

Grist mill

Fermentation and Lagering

Tank type

Tank size

Insulation

CIP cleaning

Yeast handling

Hot/Cold water handling

Filter

Fillling

Bottles

KEG

Value [Unit]

2 or 4 roller grist mill

Cylindro conical tank (CCT)

20–40 [hl]

Insulated or non-insulated

Manual – lost cleaning or
fully automatic – recuperation system

Cooled yeast tubs, yeast propagation


Lost or recuperation system

Cartridge filter or kieselgur filter

Filling line with 500 bottles/h up to
1000 bottles/h (semi-automatic)

KEG cleaning and filling machine,
30 KEGs/h (semi-automatic)

Standard Drawing of 20 hl Module Brewery by Joh. Albrecht

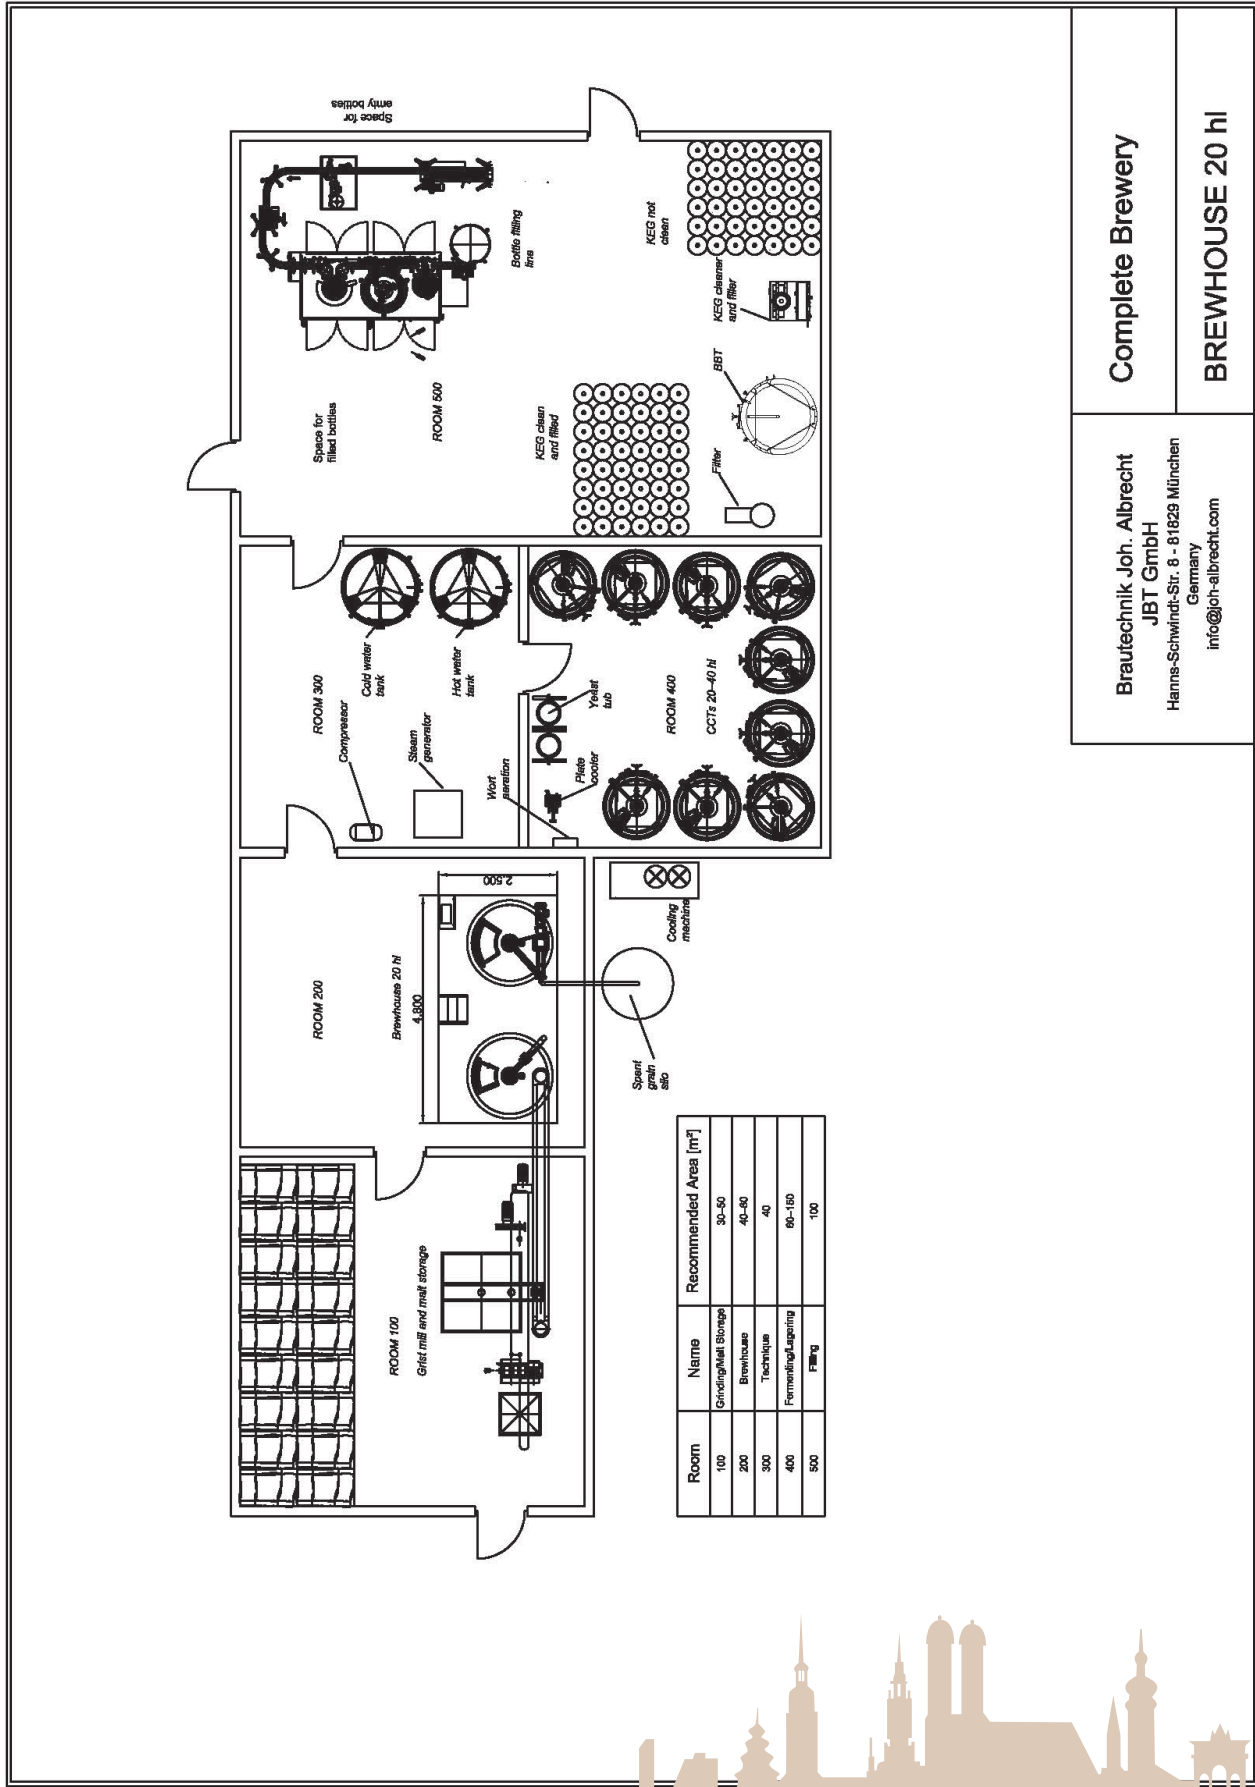

Complete Brewery

BREWHOUSE 20 hl

Brautechnik Joh. Albrecht
JBT GmbH
Hanns-Schwindt-Str. 8 · 81829 München
Germany
info@joh-albrecht.com

